




### Assembly

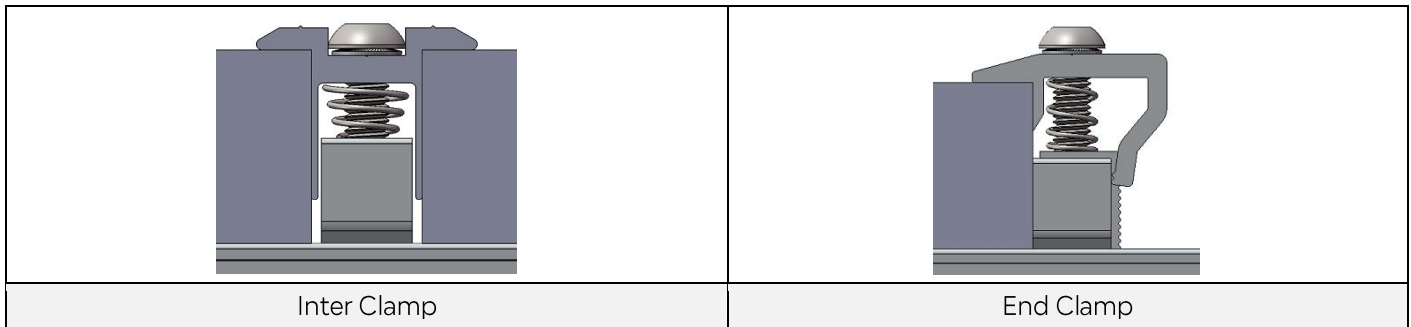

### Component

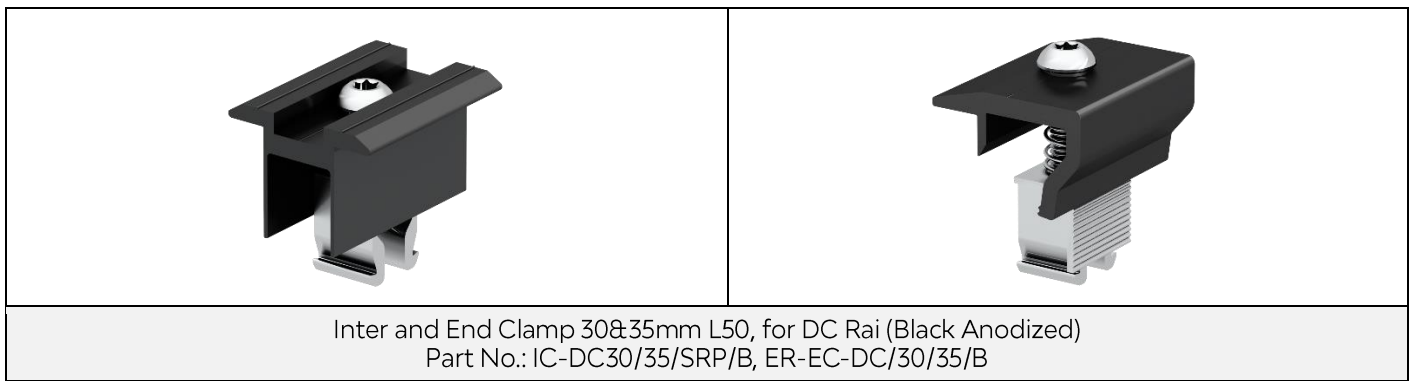

### Technical Specification
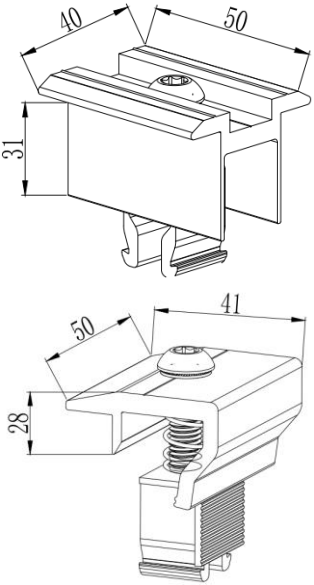
<b>Application</b>	For framed PV Modules of 30 and 35mm in height	
<b>Requirement</b>	IC-DC30/35/SRP/B need 20mm space between PV Modules ER-EC-DC/30/35/B need 17mm space on each side of the Rail	
<b>Recommended Torque</b>	Inter Clamp: 14N·m End Clamp: 14N·m	
<b>Weight</b>	IC-DC30/35/SRP/B: 0.056 kg ER-EC-DC/30/35/B: 0.075 Kg	
<b>Packaging</b>	IC-DC30/35/SRP/B: 45 units per pack, 4 packs (180 units) per carton ER-EC-DC/30/35/B: 60 units per pack, 4 packs (240 units) per carton	
<b>Material</b>	Main parts: AL6005-T5 Fasteners: SUS 304	
<b>Color</b>	Black (full anodized, no less than 10 μm)	
<b>Standard</b>	GB50797   AS NZS1170.2-2011   EN1991   JISC8955   ASCE 7-10	